

FREE

chevron wall hanging




SUPPLIES & TOOLS:

- 1/8 yd. each of eight coordinating Piccadilly by DS Quilts Collection fabrics
- 3/8 yd. tan Etchings by Fabric Traditions fabric
- 1/4 yd. Piccadilly by DS Quilts Collection border fabric
- 2/3 yd. Piccadilly by DS Quilts Collection backing fabric
- 1/2 yd. Piccadilly by DS Quilts Collection binding fabric
- 24" square of batting
- Basic sewing supplies
- Sewing machine
- Iron & pressing surface
- Sewing thread to match fabrics
- Quilting thread
- Rotary cutter, mat & ruler
- 1" quilt basting safety pins

Sew all seams using a 1/4" seam allowance unless noted otherwise.

DIRECTIONS:

1. From the Etchings fabric, cut twenty-four 4" x 4" squares.
2. From each of the eight printed fabrics, cut three 4" x 4" squares (total of 24 squares).
3. From the border fabric, cut four 2" x 25" strips.
4. From the backing fabric, cut one 24" x 24" square.
5. From the backing fabric, cut one 10" x 24" square for the hanging sleeve.
6. From the batting, cut one 24" x 24" square.
7. From the binding fabric, cut 2-1/2" bias strips to equal 100" of bias binding.
8. Draw a diagonal line with a pencil from one corner to the opposite corner on the back of an Etchings 4" square.



Skill Level: Some experience necessary

Crafting Time: Varies

Courtesy of Fabric Traditions

Creative Ideas from Jo-Ann
more projects, tips & techniques at Joann.com®

Please read and follow all manufacturers' instructions for all tools and materials used. Provide adult supervision if children participate in this project. #095-3863

©2014 Jo-Ann Stores, Inc.

JOANN
fabric and craft stores®


9. Layer right sides together the Etchings 4" square on top of a 4" print square.




10. Stitch 1/4" on both sides of the drawn diagonal line.



11. Cut directly on the drawn line to get two half-square-triangle squares.




12. Repeat steps 11 through 14 for all of the 4" Etchings and print squares.
13. Press half of the seams toward the print side and half toward the Etchings sides.

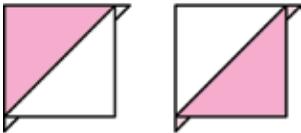


14. Trim the squares to 3-1/2" x 3-1/2".
15. Lay out the 3-1/2" squares in six rows of six squares each to make three zigzags across the quilt. Position squares as desired. There will be some squares left over, which will not be used. HELPFUL HINT: When arranging the rows, alternate squares with seam allowances pressed toward the print side and squares with seam allowances pressed toward the Etchings side. This will make it easier to match seams when sewing the squares together.
16. Stitch the squares in each row together.



17. Stitch the rows together, matching seams.

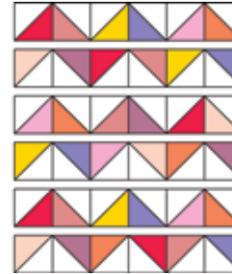


18. The quilt should measure 18-1/2" x 18-1/2".
19. Fold a border strip in half along the short dimension. Measure out from the center fold 9-1/4" along the inside edge of the border strip.

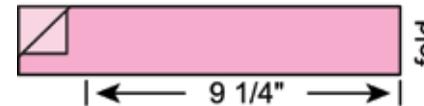


20. Use a ruler to cut a 45-degree angle outwards from the point found in step 24. Cut both ends of the border strip at the same time.




21. Repeat steps 23 and 24 for the other three border strips.
22. Match the centers and ends of the border strips to the centers and ends of each side of the quilt.
23. Sew the four borders to the sides of the quilt, starting and stopping 1/4" away from quilt corners. Lock the stitches at both ends of this seam to prevent it from unraveling.

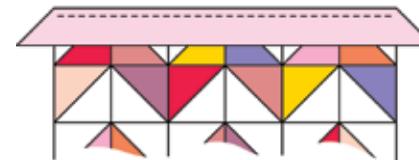


24. Match the diagonal edges of the border strips at each corner.
25. Hold the side seam allowances out of the way and sew the corner seams together. Stop stitching just before reaching the point where the side seams meet. Do not sew beyond the side seams. Lock the stitches to prevent unraveling.




26. Press well.
27. After sewing on the borders, the quilt should measure 21-1/2" x 21-1/2".

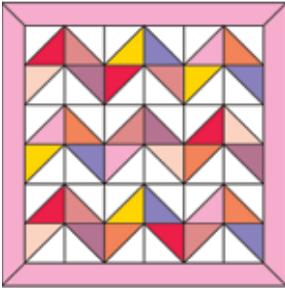

28. On a flat surface, layer the backing fabric right side down, then the batting, and then the quilt top right side up.
29. Baste the quilt every 3"-4" with 1" quilt basting safety pins.
30. Quilt as desired. The quilt shown was machine quilted in the Etchings areas 1/4" away from the chevron seams.
31. After quilting, baste stitch 1/8" around the outside edges of the quilt to keep the layers together.
32. Stitch the bias strips together end to end with diagonal seams. Press the seams open.

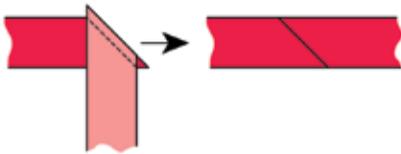

33. Fold and press the bias binding in half along the length to make double fold bias binding.
34. Sew the binding to the quilt front along the quilt edge by machine.

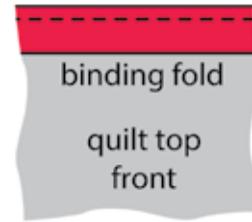

35. Trim the edges of the batting and backing even with the binding seam allowance.
36. Flip the binding to the back and hand stitch in place using a slip stitch.
37. Follow Steps 44 through 49 for attaching a label and a hanging sleeve.
38. To finish the 10" side edges of the hanging sleeve, fold 1" to the wrong side and stitch down.



39. Fold the hanging sleeve in half lengthwise right sides together and stitch. Turn right side out.



40. Press the sleeve so that the seam is in the center of the back of the sleeve.



41. Sew the sleeve to the back of the quilt by hand with a whipstitch, taking care that the stitches do not show on the front of the quilt.
42. Make a name/date label and sew it onto the back of the quilt.