

Fabric placement Key:

The bottom three strips (#'s 1, 5, 9) are side A. The left three strips (#'s 2, 6, 10) are side B. The top three strips (#'s 3, 7, 11) are side C. The right three strips (#'s 4, 8, 12) are side D.

RIOCK 7.

Use Fabric Placement Key the drawing above for the size of the strips to gather the pieces for blocks 1 through 9.


RI OCK 4.

BLOCK I.		BLOCK 4.		BLOCK 7.	
Cen	ter White/pink print	Center	Orange blender	Center	White/gold print
Side	A Magenta solid	Side A	Yellow/green print	Side A	Tan/beige blender
Side	B Light pink blender	Side B	White/pink print	Side B	Gold solid
Side	C Light pink blender	Side C	Medium pink blender	Side C	Gold solid
Side	D Medium pink blender	Side D	Medium pink blender	Side D	Light green solid
BLOCK 2:		BLOCK 5:		BLOCK 8:	
Cen	ter White/gold print	Center	Gold Solid	Center	Medium blue solid
Side	A Medium pink blender	Side A	Light green print	Side A	Medium green solid
Side	B Light pink blender	Side B	Yellow/green print	Side B	Medium green solid
Side	C Orange blender	Side C	Yellow/green print	Side C	Blue/green/pink print
Side	D Orange blender	Side D	White/gold print	Side D	Light green print
BLOCK 3:		BLOCK 6:		BLOCK 9:	
Cen	ter Magenta solid	Center	Dark blue/green print	Center	Medium green solid
Side	A White/pink print	Side A	Light green print	Side A	Dark blue/green print
Side	B Tan/beige blender	Side B	Light green print	Side B	Blue/green/pink print
Side	C Tan/beige blender	Side C	Light green solid	Side C	Medium blue solid
Side	D Light green solid	Side D	Blue/green/pink print	Side D	Dark blue green print



BLOCK 1.

To sew a Log Cabin block, sew strips to the center square in order as shown below, starting by sewing strip #1 to the center square, then #2 and continue adding strip #'s 3-12. Sew blocks in order as shown below. Always press the seam allowance away from the center as arrows indicate (except for the last seam on Blocks #4, 5, 6.)*
*See note on pressing at the bottom right of the page.

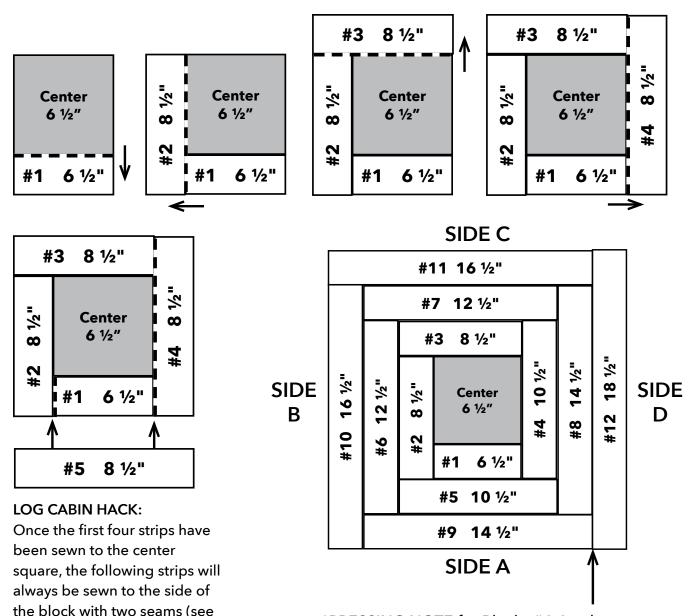

*PRESSING NOTE for Blocks #4-6 only: Press the seam allowance of the last seam on Side D toward Strip #8 (instead of away from the center). This will help the seam allowances to nest in place when sewing the rows of blocks together.




drawing above).

where arrows are pointing in

without an intersecting seam.

Never sew a strip to a side

Sew the blocks into three rows of three. Press seam allowances as shown by arrows below. NOTE: Side A should always be in the same position for each block.

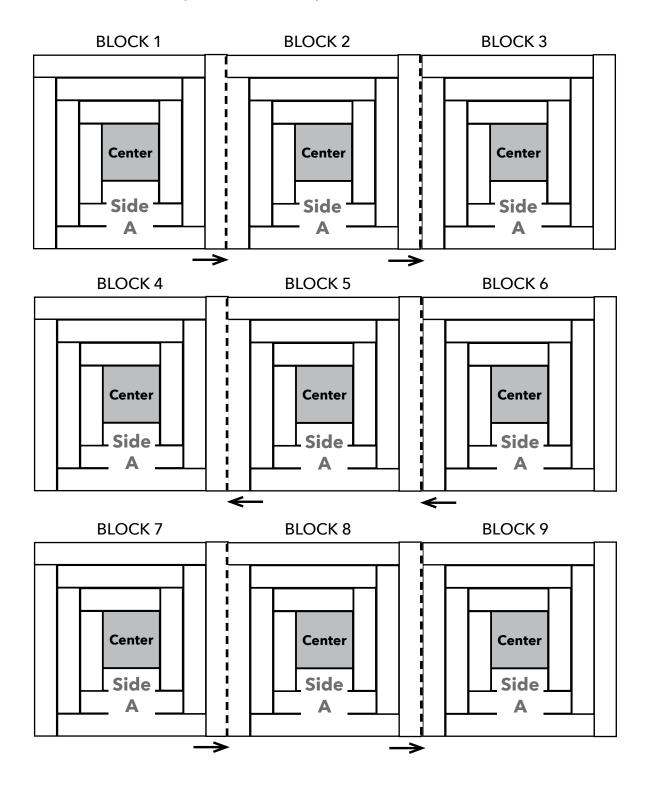

JOANN

Sew the the rows together and press seam allowances toward the bottom of the quilt.

